




BOOST DOWNLIGHTS



ANKUR EURO BOOST RECESSED DOWNLIGHTS

Introducing the LED Boost Downlight – an epitome of contemporary lighting innovation brought to you by Ankur Lighting. Crafted meticulously to harmonize aesthetics with performance, this exceptional lighting solution is available in three versatile sizes and offers a spectrum of three distinctive reflector finishes. Prepare to be captivated by its sleek design, unwavering durability, and transformative illumination.



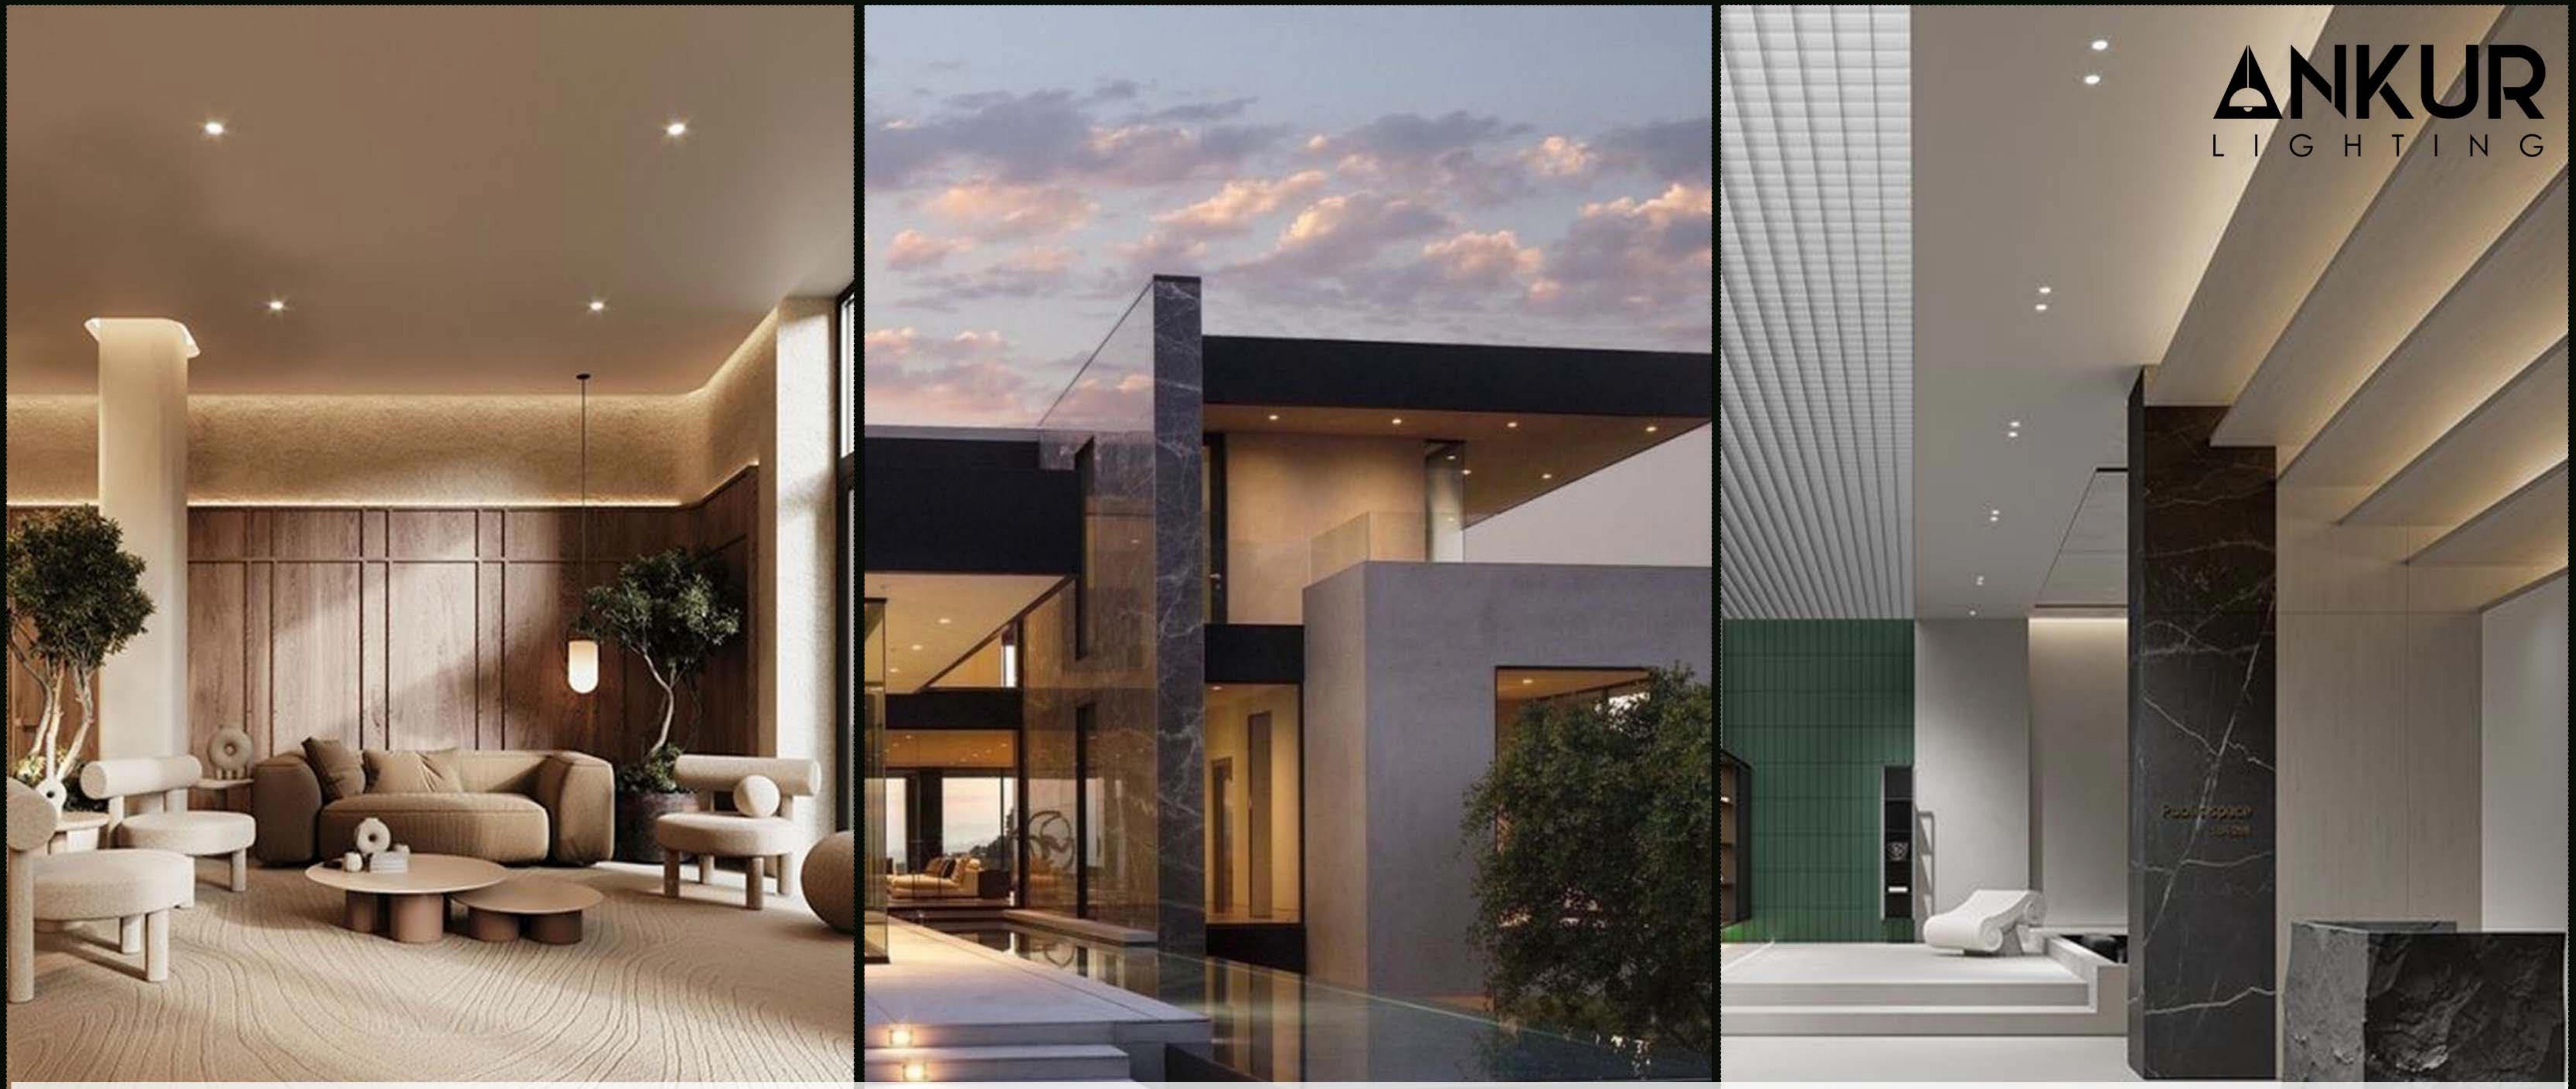

The LED Boost Downlight represents more than just a lighting solution—it's a testament to Ankur Lighting's dedication to innovation and excellence.

Features



Available in 3 sizes



3 Inner Collar Finishes



Compact Design

Technical Specifications

ANKUR XRL LED IP						
	9509	9510	9511			
Wattage(W)	5W	12W	18W			
Lumen Output	W 3000K N 4000K C 6500K	550lm 575lm 625lm	1320lm 1380lm 1500lm	1980lm 2070lm 2250lm		
System Efficiency	no. of LEDs	01	01	01		
Dimensions (in mm)	Diameter Ø	40	60	70		
	Cutout CO	35	50	65		
	Height H	58	82	100		

CRI	IP RATING	INPUT	PF	THD	EFFICACY
>90	IP-20	240V/50Hz	>0.9	<10%	>90%
System Specs					Pressure Die-Cast Aluminum
Housing					Bridgelux, Citizen
LED Make					
Beam Angles					5W, 12W, 18W 14° 24° 36°
Colour Options					Housing White Black Inner Collar Black White Grey

