



Dia: Ø138mm



Dia: Ø117mm



Dia: Ø88mm



Dia: Ø84mm



Dia: Ø74mm

LANA


SERIES



ANTI-GLARE



TILTABLE
30°




TUNEABLE

AVAILABLE IN 5 SIZES

Ankur Lana Recessed LED Downlight in a stunning matte white finish is ideal for any area. This light works extremely well in both low and high ceilings and in areas that don't get natural light, such as rooms in the centre of your home, adding a touch of elegance and muted tones to your wherever you decide to place it in your beautiful spaces.



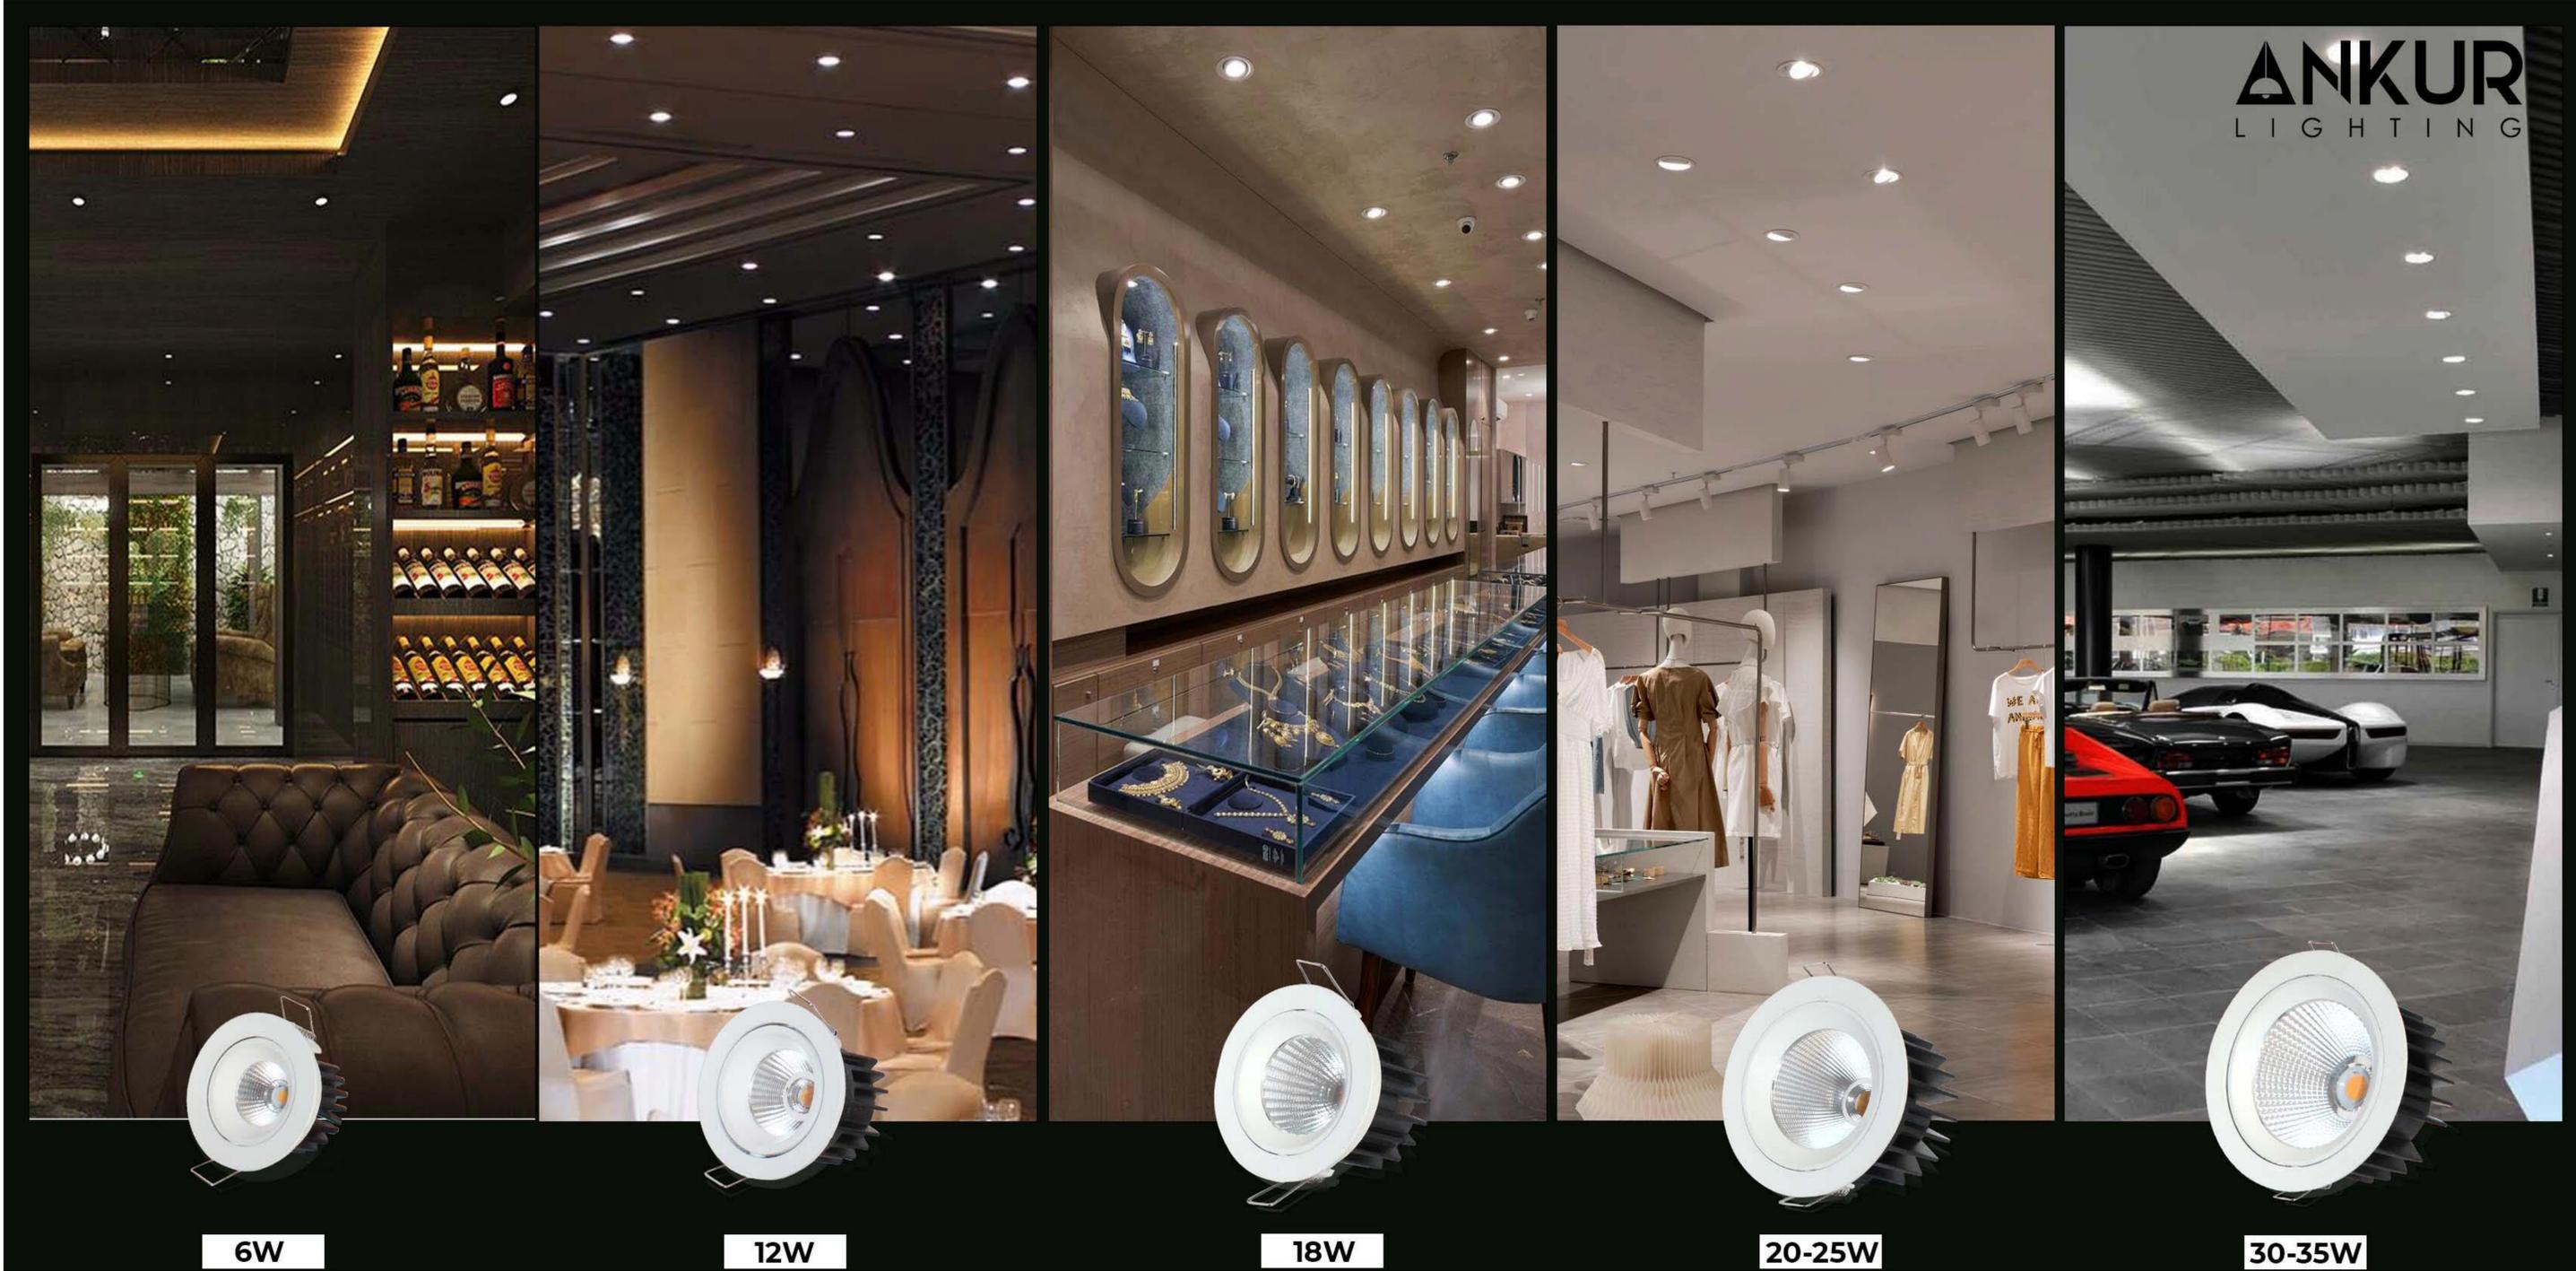

6W

12W

18W

20-25W

30-35W

Features

Technical Specifications



Tiltable



High Quality COB Chip



Body Finish - White and Black

		ANKUR XRL LED IP				
		9492	9493	9494	9494A	9494B
Wattage(W)		6W	12W	18W	20-25W	30-35W
Lumen Output	W 3000K	660lm	1320lm	1980lm	2200-2750lm	3300-3850lm
	N 4000K	690lm	1380lm	2070lm	2300-2875lm	3450-4025lm
	C 6500K	750lm	1500lm	2250lm	2500-3125lm	3750-4375lm
System Efficiency	No. of LEDs	01	01	01	01	01
Dimensions (in mm)	Diameter Ø	74	84	88	117	138
	Height H	50	60	67	82	85
	Cutout CO	65	73	77	100	118

CRI	IP RATING	INPUT	PF	THD	EFFICACY
> 90	IP-20	240V/50Hz	>0.9	<10%	>90%

System Specs	Housing	Pressure Die-Cast Aluminum
LED Make	BRIDGELUX, LUMILEDS (Philips)	
Driver Brand	Fulham / Philips / Osram	

Beam Angles	6W	12W	18W	20W-35
	14°	24°	36°	60°

Colour Options	Housing	White Black
----------------	---------	-------------

