

ANKUR LARK SERIES




High flexibility , Complete Serialization

A very complete and compact **LARK** lamp series with single lamp, double lamp and triple lamp series, effectively preventing glare with optimum lighting. The light has excellent color performance and dramatically improve lighting quality of the space.






High precision design, better fit into the decoration ,effectively prevent glare. The light has excellent color performance and can effectively improve lighting quality on the displayed products.



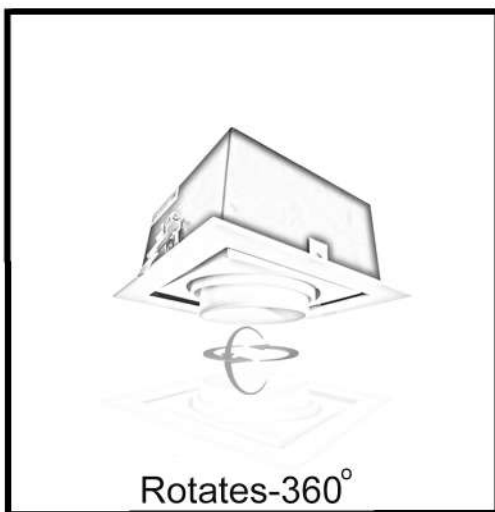


Ankur downlight series

Part of a family of multiple downlights. Fully adjustable and providing a range of outputs. The luminaire offers a choice of beam angles (including a narrow 10° beam angle for accenting), color rendering options, a thin trim version and choice of accessories. The luminaire has a lumen maintenance of 50,000 hours.

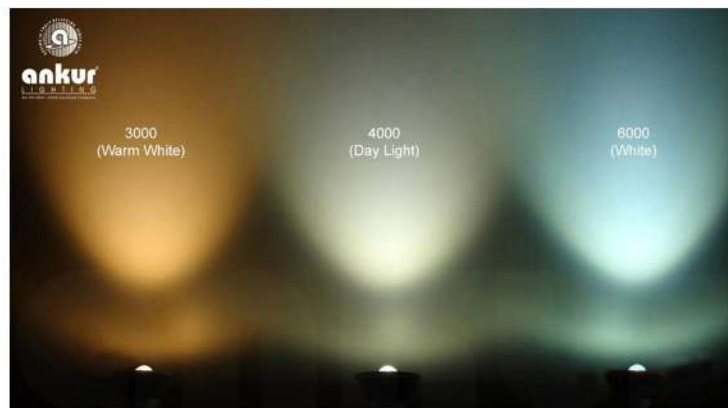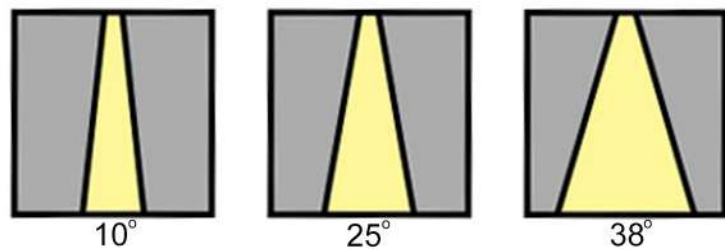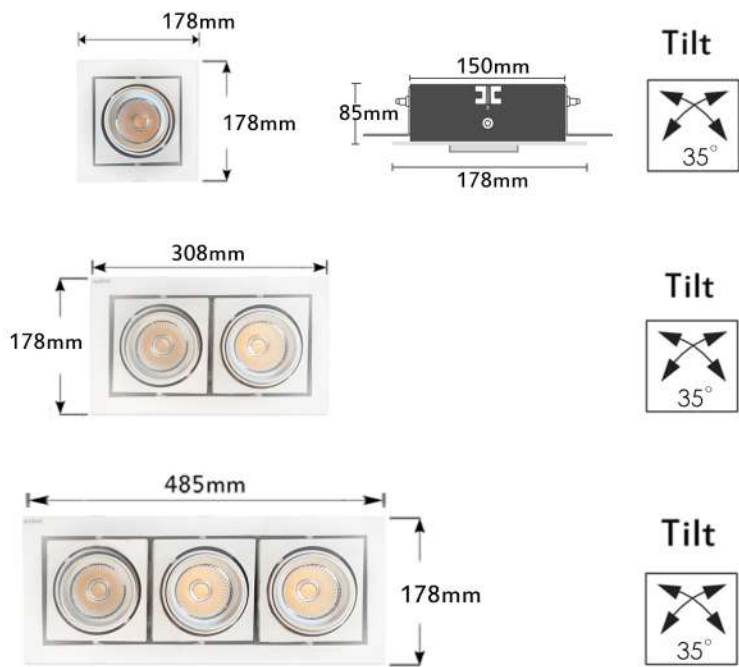

Accessories:



Honeycomb louver

Available for most luminaires in the range, these louvers enhance visual comfort by controlling unwanted light spill.




Softening lens


Designed to create a smoother, softer beam edge, these lenses are available for most luminaires in the range.



Snoot

Available for the multi series, a snoot can be used to reduce the field angle and control unwanted glare.

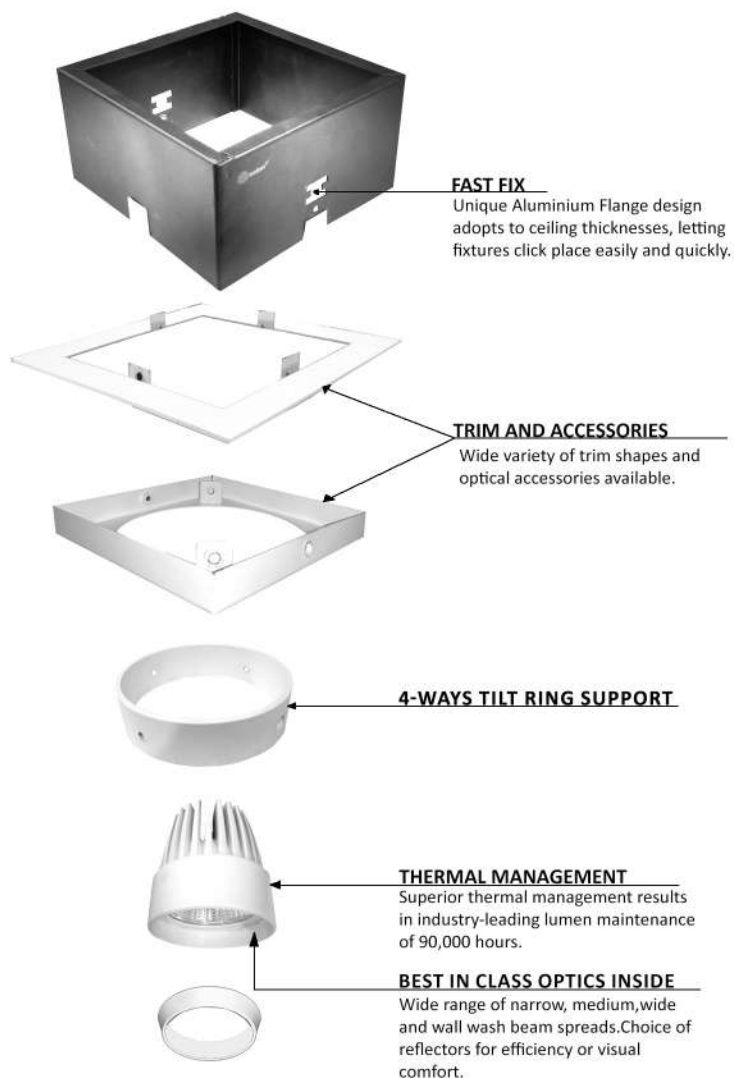


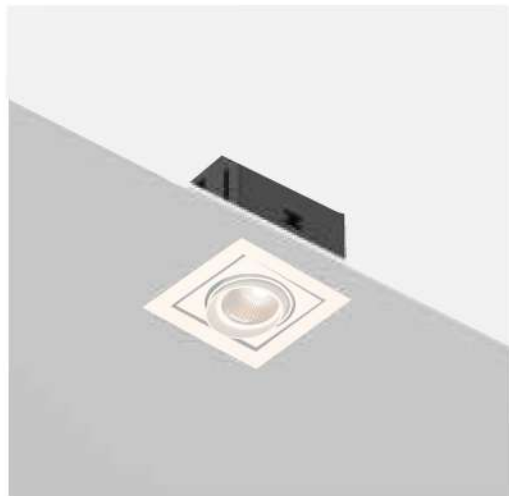

ANKUR XRL-LED IP/9325 1LP

Material: Pressure Die-cast aluminium+MS Box duly powder coated
 Rotates: 4 side rotation
 Built in anti-glare snoot.

Lamp: COB 1x20W/1X30W
 3000K / 4000K / 6000K
 CRI 80/90
 Reflector angle: 10° / 25° / 38°
 AC220V~50/60Hz
 Size: L:178mm W:178mm H:85mm
 Cutout: L:150mm W:150mm

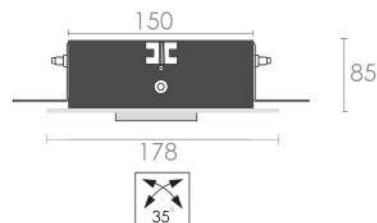

Available color:



WH



BK




SV



ANKUR XRL-LED IP/9325 2LP

Material: Pressure Die-cast aluminium+MS Box duly powder coated
 Rotates: 4 side rotation
 Built in anti-glare snoot.

Lamp: COB 2x20W / 2x30W
 3000K / 4000K / 6000K
 CRI 80/90
 Reflector angle: 10° / 25° / 38°
 AC220V~50/60Hz
 Size: L:308mm W:178mm H:85mm
 Cutout: L:280mm W:150mm

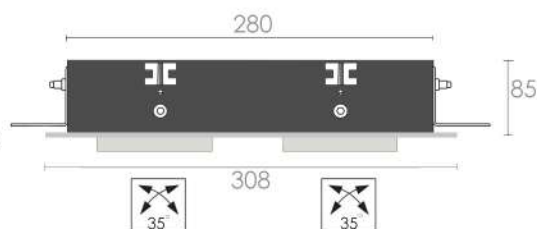

Available color:



WH



BK



SV



ANKUR XRL-LED IP/9325 3LP

Material: Pressure Die-cast aluminium+MS Box duly powder coated
 Rotates: 4 side rotation
 Built in anti-glare snoot.

Lamp: COB 3x20W/3X30W
 3000K / 4000K / 6000K
 CRI 80/90
 Reflector angle: 10° / 25° / 38°
 AC220V~50/60Hz
 Size: L:485mm W:178mm H:85mm
 Cutout: L:430mm W:150mm



Available color:




WH



BK




SV




H(m)	D(m)	E(lx)
1	0.28	3400
2	0.56	850
3	0.84	377
4	1.12	212
5	1.4	136

LED 3000K 10°



H(m)	D(m)	E(lx)
1	0.44	2248
2	0.88	562
3	1.32	250
4	1.76	140
5	2.2	90

LED 3000K 25°



H(m)	D(m)	E(lx)
1	0.65	1525
2	1.30	381
3	1.95	169
4	2.6	95
5	3.25	61

LED 3000K 38°