

ATL LISC A

Surface Mounted



LED surface mounted sturdy ergonomically designed downlight equipped with die-cast aluminium housing having smooth powder coated finish and anti-glare UV stabilized polycarbonate diffuser allowing 95% of uniform lux spread over. In-built heat sink for better thermal management with the energy efficient electronic driver having 3 KVA surge protection.

Small & Compact Design






Surface Mounted with
Clear Lens COB



Surface Mounted with
Polycarbonate
Diffuser




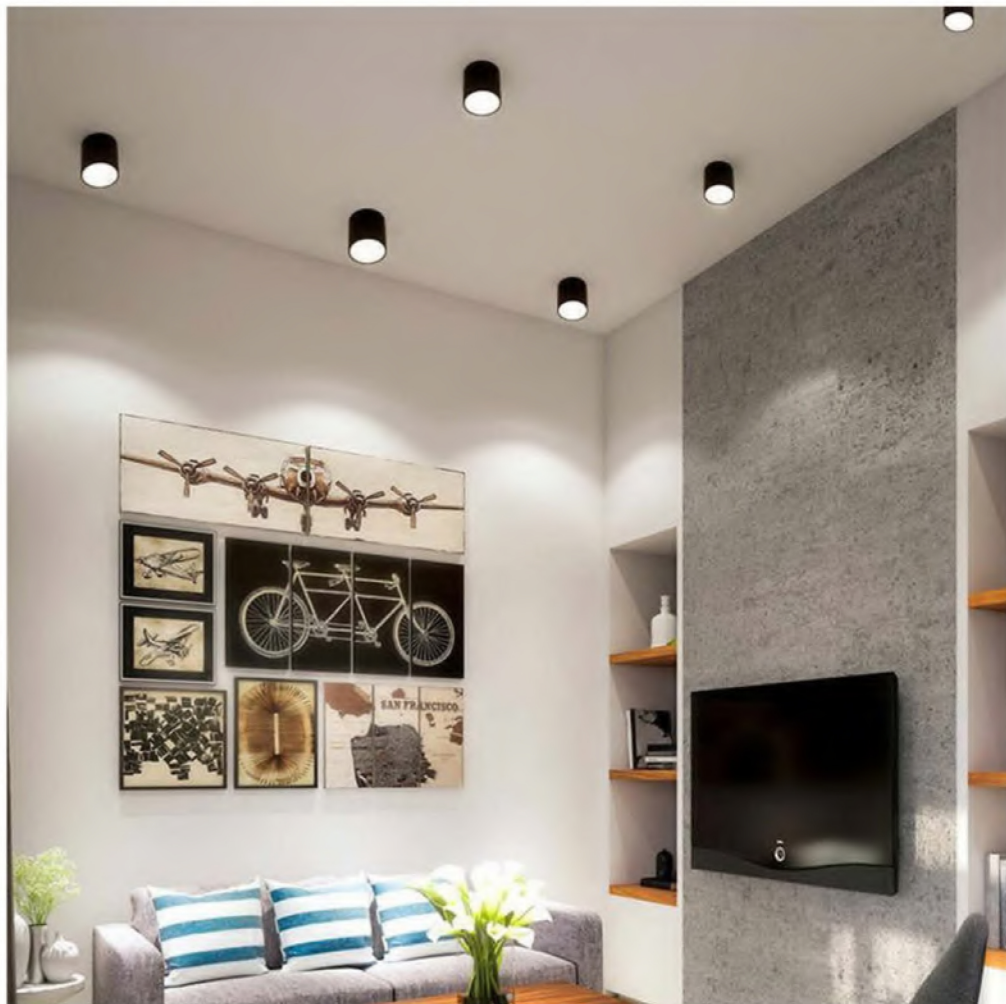

ANKUR XSL - LED - IP/9436



Wattage: 18W
Material: Aluminium
Optics: Engineered Clear Lens
CRI: 80/90
Colour Temperature: 2700K/3000K/ 4000K/ 6500K/ Tunable
Lumens Per Watt: 95lm/105lm/110lm/115lm
Reflector angle: 10°/ 20°/ 30°
Diameter : 85mm
Height : 95mm




Available Colours:




ANKUR XSL - LED - IP/9437



Wattage: 18W
Material: Aluminium
Optics: Polycarbonate Diffuser
CRI: 80/90
Colour Temperature: 2700K/3000K/ 4000K/ 6500K/ Tunable
Lumens Per Watt: 95lm/105lm/110lm/115lm
Reflector angle: 120°
Diameter : 85mm
Height : 95mm



Available Colours:

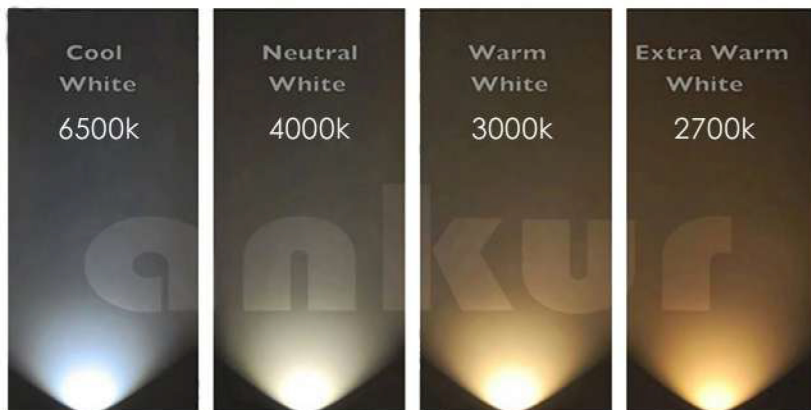

ANKUR ATL LISCA 9010 WITH COB



Deep recessed light source,
Reduced glare.



ATL LISCA DOWNLIGHT

LED recess mounted aesthetically designed downlights equipped with die-cast aluminium housing having smooth powder coated finish and anti-glare UV stabilized clear lens allowing 95% of uniform lux spread over. In-built heat sink for better thermal management with the energy efficient electronic driver having 3 KVA surge protection.



Glare Free



LISCA

The essence of brilliant lighting

LISCA's unique lighting technology, designed in ANKUR LIGHTING, is a high light in the world of miniaturized recessed luminaires. These modern downlighters are perfect for domestic or commercial use.

Uniformly distributed light from a high quality diffuser and a LED light source. Installing this downlight fixture can be relatively easy and quick.

It is also able to be used with either a dimmable and non - dimmable remote driver.





ANKUR XRL - LED - IP/9010 9W/12W/15W



ATL LISCA WITH POLYCARBONATE DIFFUSER

LED downlight has been specifically designed by incorporating cost saving materials to produce a cost effective and well performing downlight solution to the market. Suitable for use in offices, reception areas, restaurants, hotels, hospitals, Downlight equipped with die-cast aluminium housing with polycarbonate diffuser.



ANKUR XRL LED LISCA

Product Features:

- Instant start / Flicker free
- Energy-saving, Environmental protection and long life up to 50000 hours.
- High CRI(Ra), the Ra is >85, excellent colour rendering.
- Excellent colour consistency. - Mercury free and no UV/IR light, reduced CO2 emission.
- Ideal for office, retail, jewellers, home lighting etc.
- Available in different wattages - 9W / 12W / 15W






ANKUR XRL - LED - IP/9010 COB DEEP RD

Wattage: 12W / 15W
 Material: Aluminium
 Optics: Clear Lens
 CRI: 80/90
 Colour Temperature: 2700K/3000K/ 4000K/ 6500K/ Tunable
 Lumens per watt: 95lm/105lm/110lm/115lm
 Reflector angle: 10° / 20°/ 30°
 Outer Dia: 115mm
 Cut Out Dia: 103mm
 Height : 100mm




Available Colours:



ANKUR XRL-LED-IP/9010

Wattage: 9W / 12W / 15W
 Material: Aluminium
 Optics: Polycarbonate Diffuser
 CRI: 80/90
 Colour Temperature: 2700k/3000K/ 4000K/ 6500K/ Tunable
 Lumens Per Watt: 95lm/105lm/110lm/115lm
 Reflector angle: 120°
 Outer Dia: 115mm
 Cut Out Dia: 105mm
 Height : 55mm



Available Colours:

