

Cool



The timeless elegant Led down-lights are cool and excited by its simplicity with wide adaptability. The light has 30 different coloured reflectors which provides unique touch to any space, also deliver overall excellent illumination & comfort in high ceiling areas with no harmful UV & IR radiations. One can easily select reflector angles from 16° - 58° according to need of a space.


Brilliance and design in its whole variety

The unique lighting technology, with perfectly concealed reflectors in different surfaces and cool - colors to become a true star in the world of led downlights. The toolless and modular luminaire assembly, combined with the optimal thermal management, guarantee the highest reliability and longevity.



Design quality
in detail

The

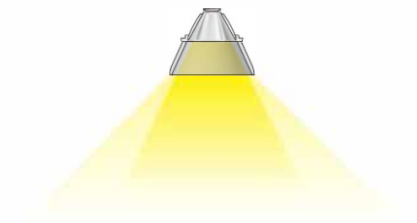


Advanced
lighting


Versatile
Design
Options







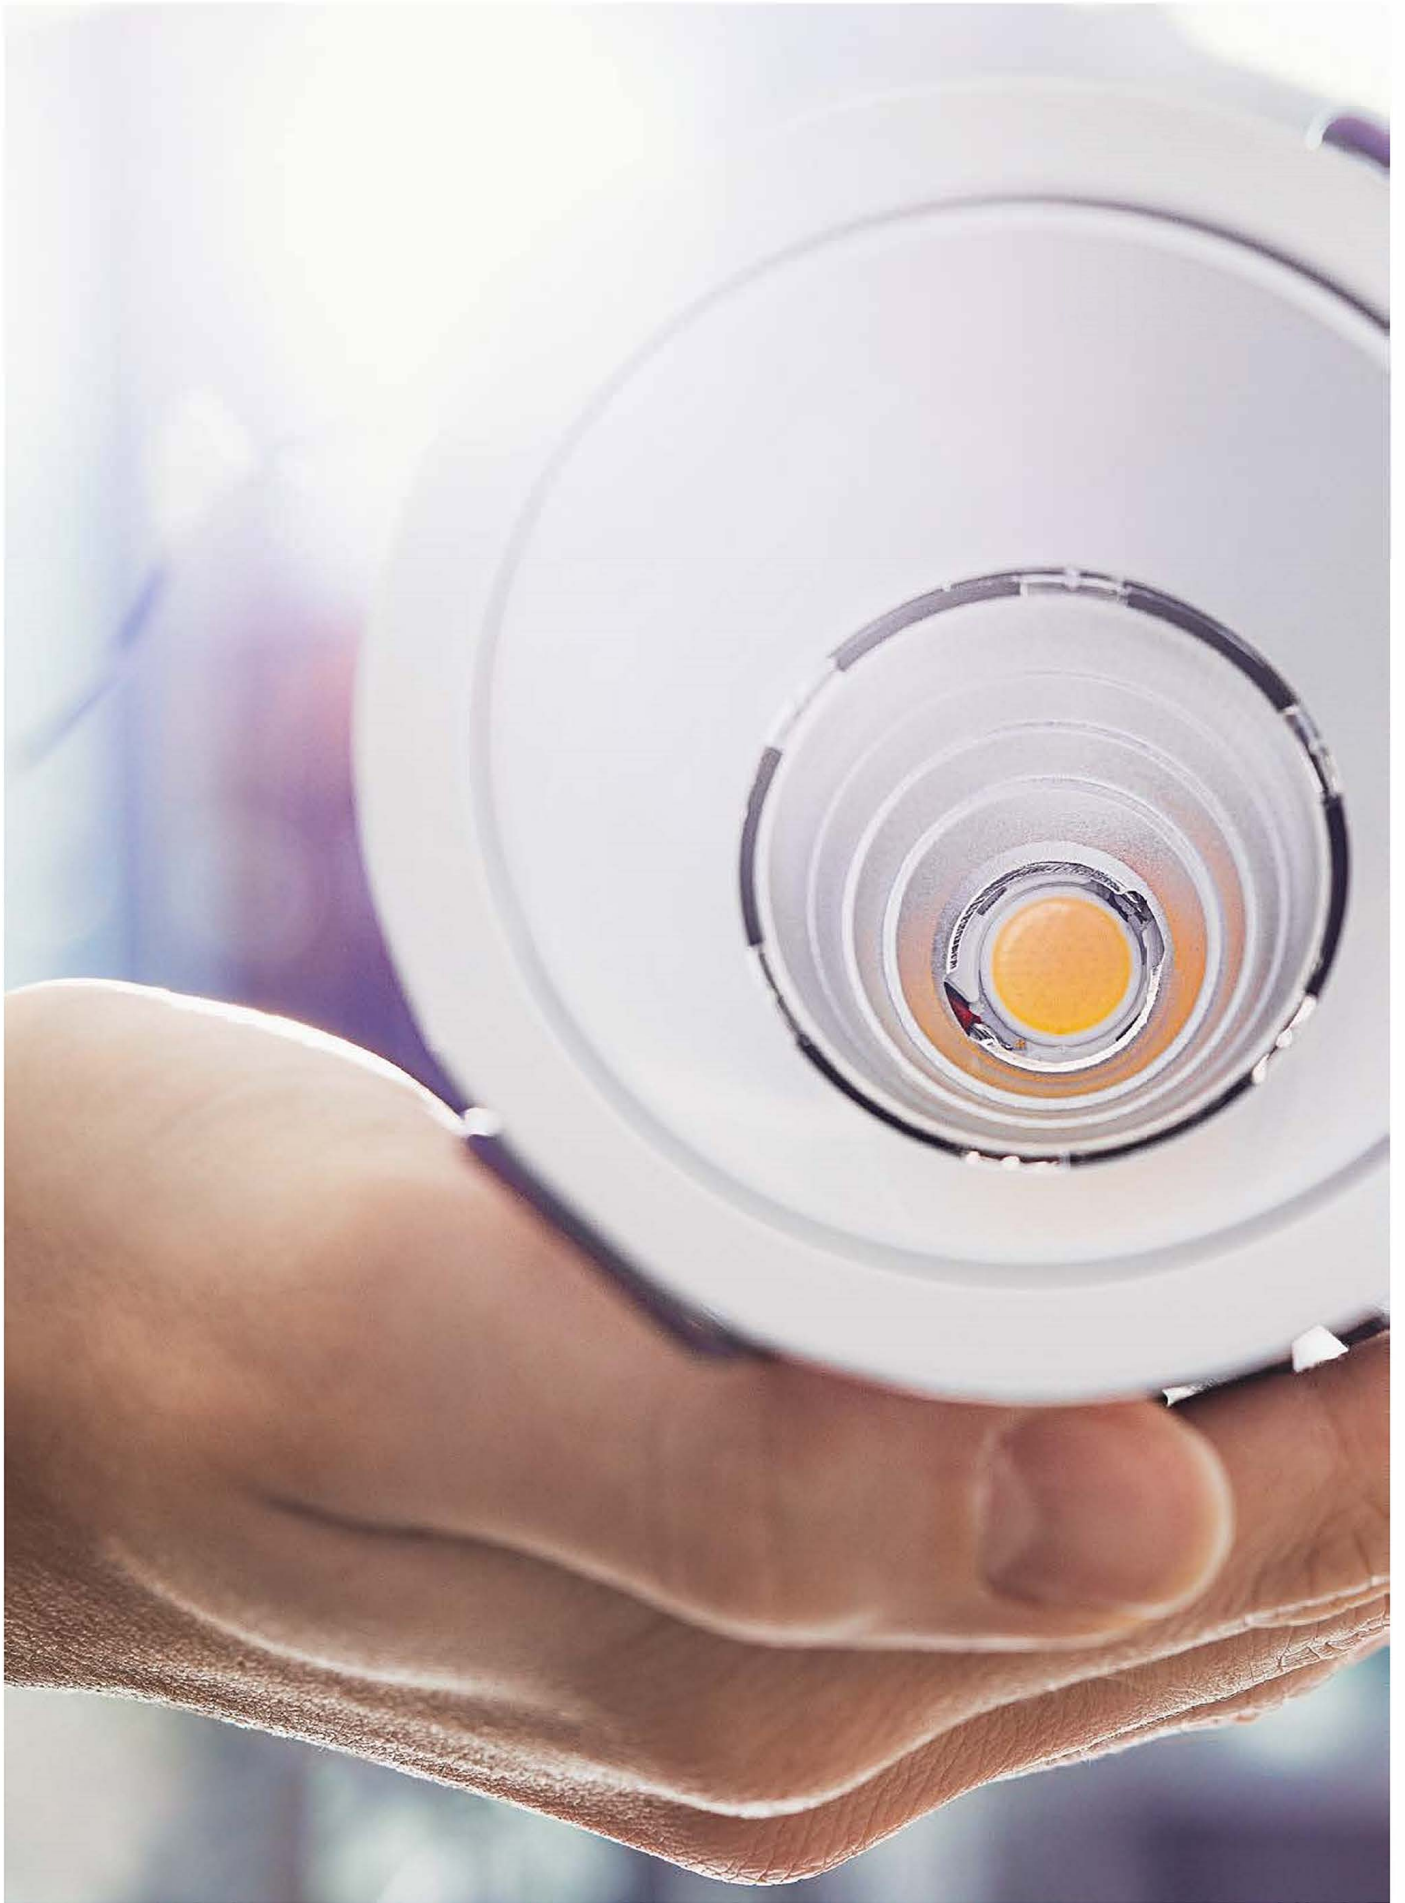

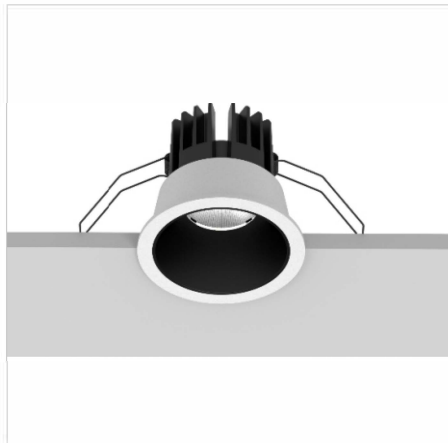


ANKUR EURO COOL XRL IP/9202 12W


Material: aluminium
Rotates: Fixed
Spot head adjust: Fixed

Lamp: COB 1x12W
2700K/3000K/4000K
CRI 80/90
Reflector angle: 16° 25° 36° 58°
AC220V ~50/60Hz
Size: Ø 85 mm H: 78mm
Cutout: Ø 75 mm

Available color:




78




LED 12W 3000K 16°

H(m)	D(m)	E(lx)
1	0.28	3400
2	0.56	850
3	0.84	377
4	1.12	212
5	1.4	136




LED 12W 3000K 25°

H(m)	D(m)	E(lx)
1	0.44	2248
2	0.88	562
3	1.32	250
4	1.76	140
5	2.2	90




LED 12W 3000K 36°

H(m)	D(m)	E(lx)
1	0.65	1525
2	1.30	381
3	1.95	169
4	2.6	95
5	3.25	61



LED 12W 3000K 58°

H(m)	D(m)	E(lx)
1	1.11	934
2	2.22	233
3	3.33	103
4	4.44	56
5	5.55	37

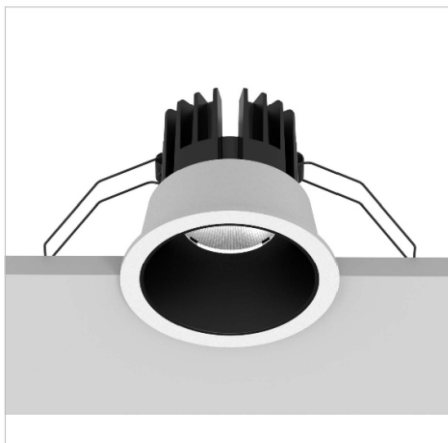


ANKUR EURO COOL XRL IP/9320 25-30W


Material: aluminium
Rotates: Fixed
Spot head adjust: Fixed

Lamp: COB 1x25W-30W
2700K/3000K/4000K
CRI 80/90
Reflector angle: 16° 25° 36°
AC220V ~50/60Hz
Size: Ø120 mm H:112 mm
Cutout: Ø 115 mm

Available color:




112




LED 25W 3000K 16°

H(m)	D(m)	E(lx)
1	0.28	6060
2	0.56	1515
3	0.84	673
4	1.12	378
5	1.4	242



LED 25W 3000K 25°

H(m)	D(m)	E(lx)
1	0.44	4000
2	0.88	1000
3	1.32	444
4	1.76	250
5	2.2	160



LED 25W 3000K 36°

H(m)	D(m)	E(lx)
1	0.65	2550
2	1.30	637
3	1.95	283
4	2.6	159
5	3.25	102

