




TESS — BOLLARD



ANKUR TESS BOLLARD EMPHASIZING ELEGANCE AND ILLUMINATION.

These luminaire heads from our modular system bollard range emit their shielded light symmetrically through 180° or 360° around the installation point and onto the respective ground surface. Luminaires for the glare-free illumination of pathways, open spaces and driveways.

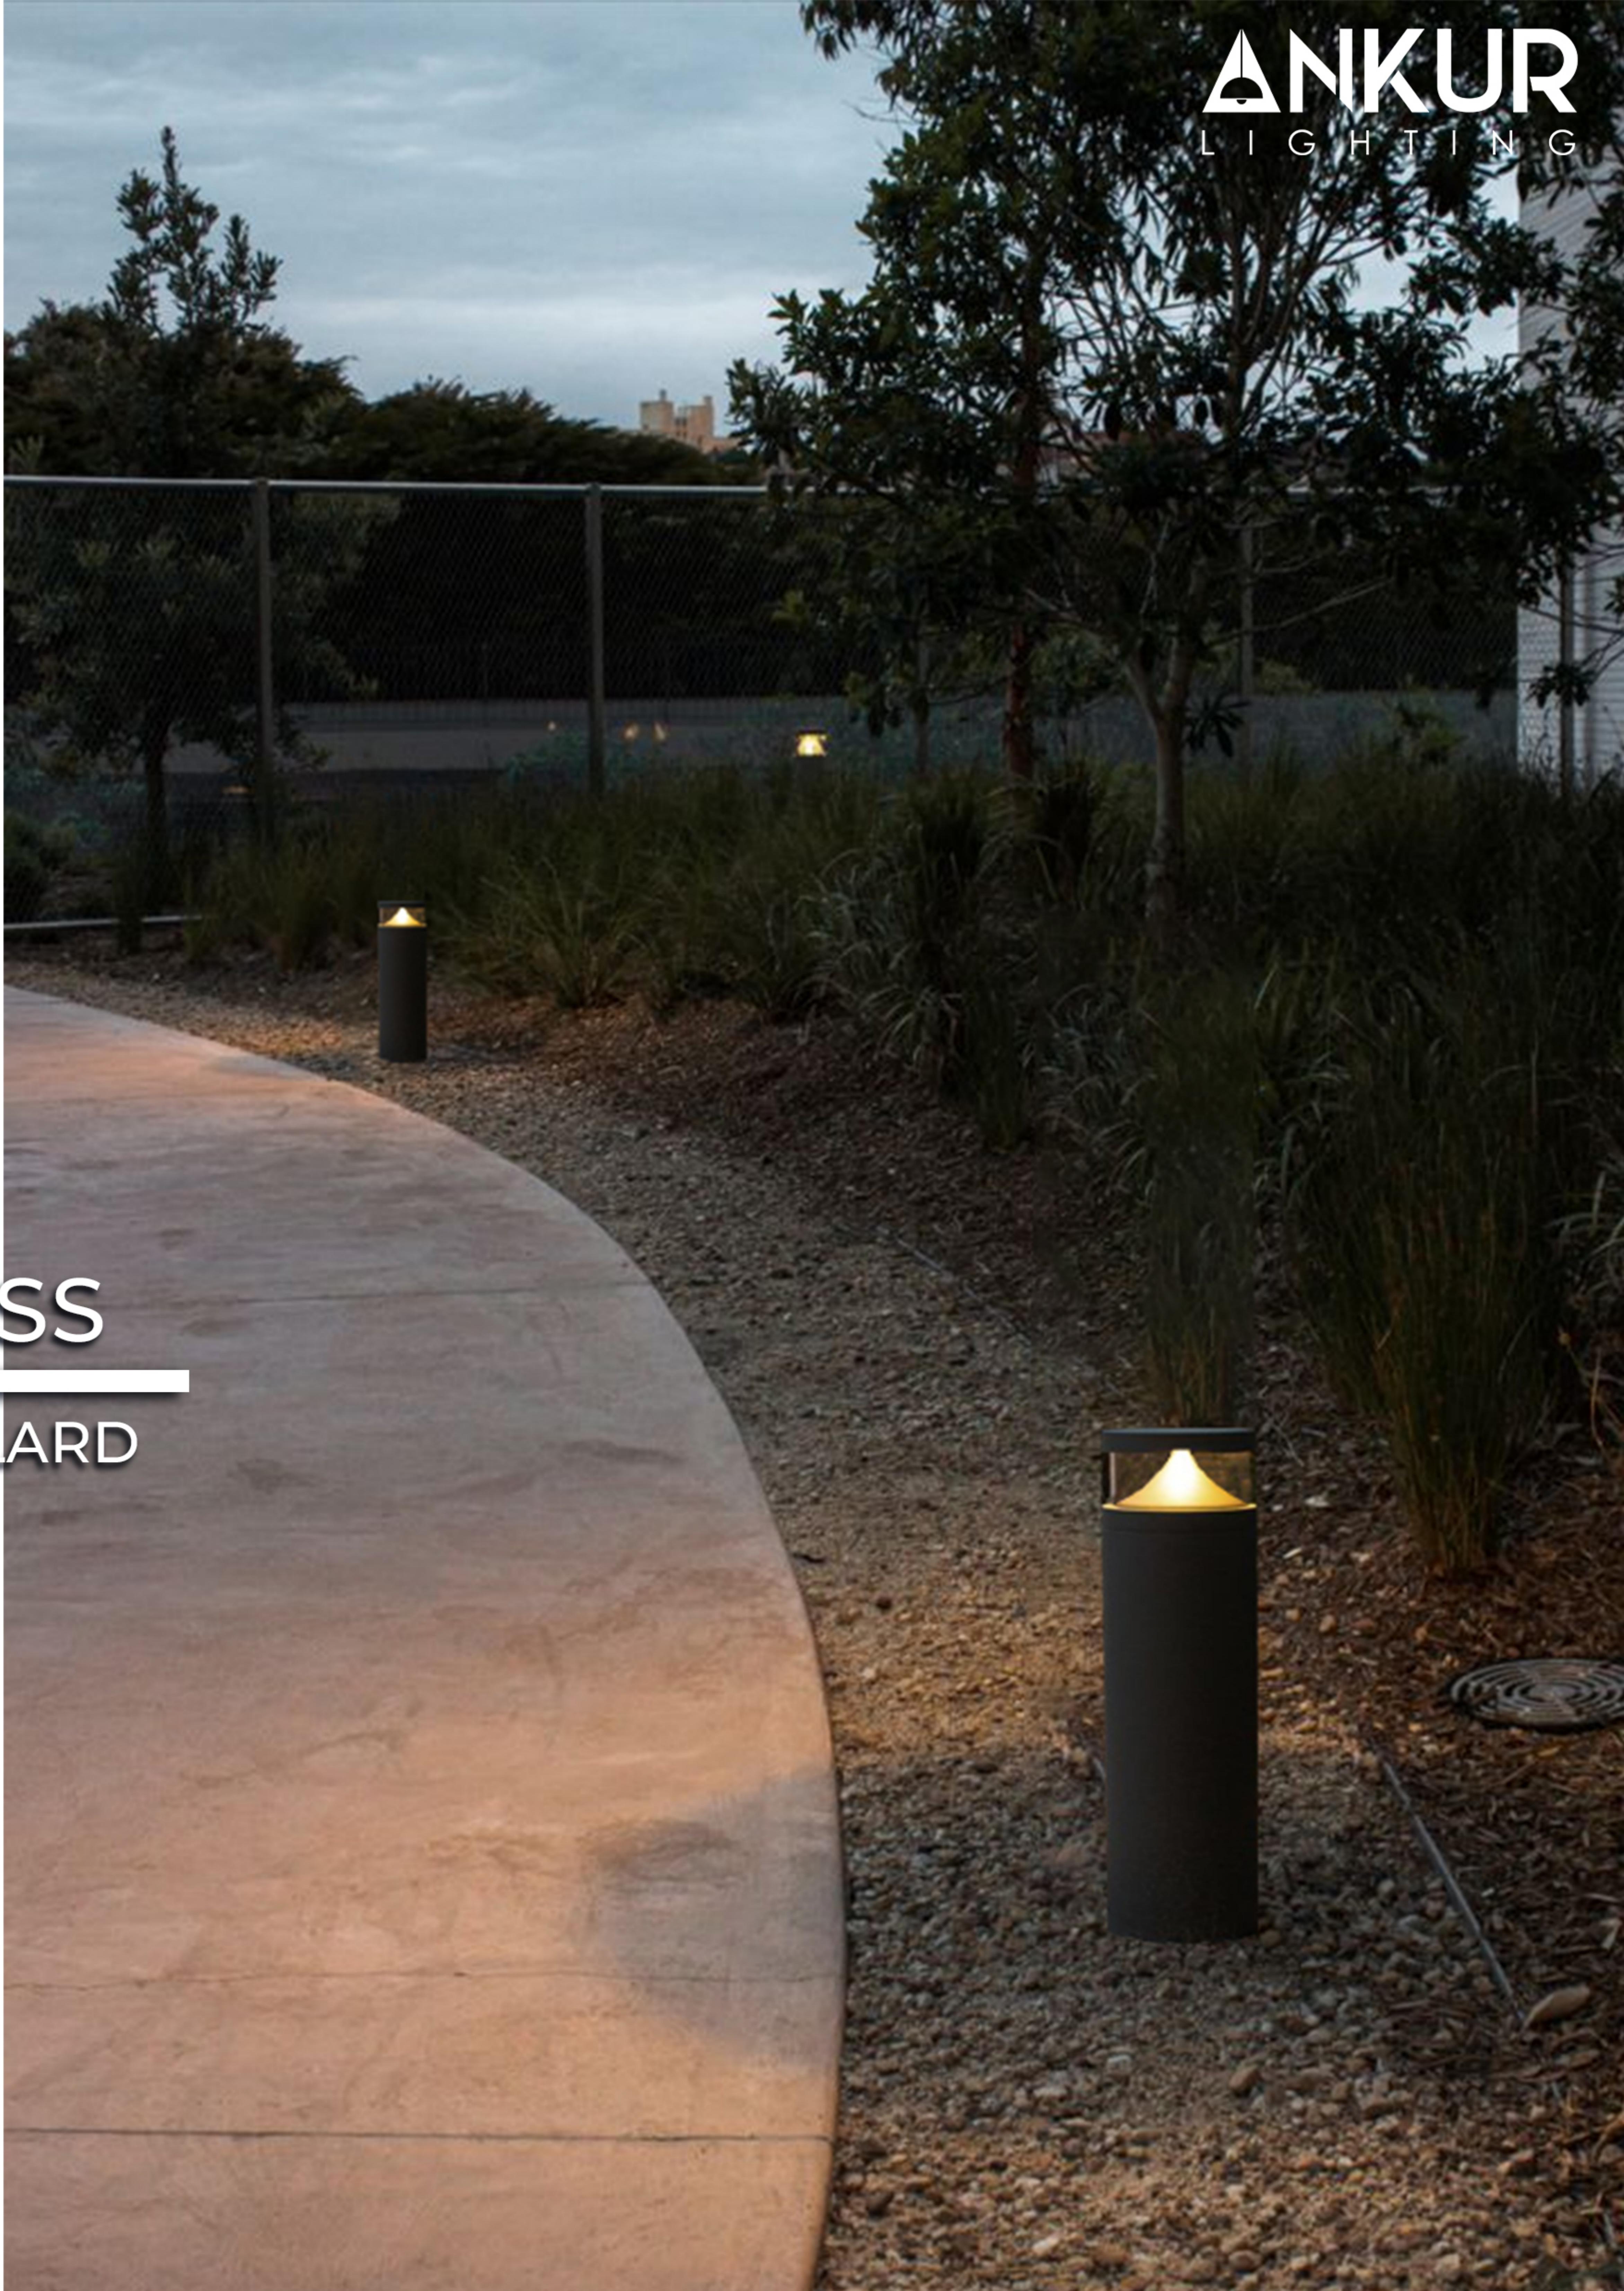



Features



Technical Specifications


ANKUR TESS BOLLARD

| Wattage(W) | | 12W | | |
|--------------------|--------------------|------------------|-----|-----|
| Lumen Output | W 2700K W 3000K | 1020lm 1080lm | | |
| System Efficiency | No. of LEDs | Multiple SMDs | | |
| | | 12W | 12W | 12W |
| Dimensions (in mm) | Diameter Ø | 100 | 100 | 100 |
| | Height H | 400 | 600 | 900 |

| CRI | IP RATING | INPUT | PF | THD | EFFICACY |
|------|-----------|------------|------|------|----------|
| > 90 | IP65 | 240V/ 50Hz | >0.9 | <10% | >90% |

| System Specs | Housing | Aluminium |
|--------------|-----------------|-----------|
| | Led Make | Bridgelux |
| | Driver Location | Inbuilt |

| Colour Options | Black | Gold | Copper | Wood |
|----------------|-------|------|--------|------|
|----------------|-------|------|--------|------|

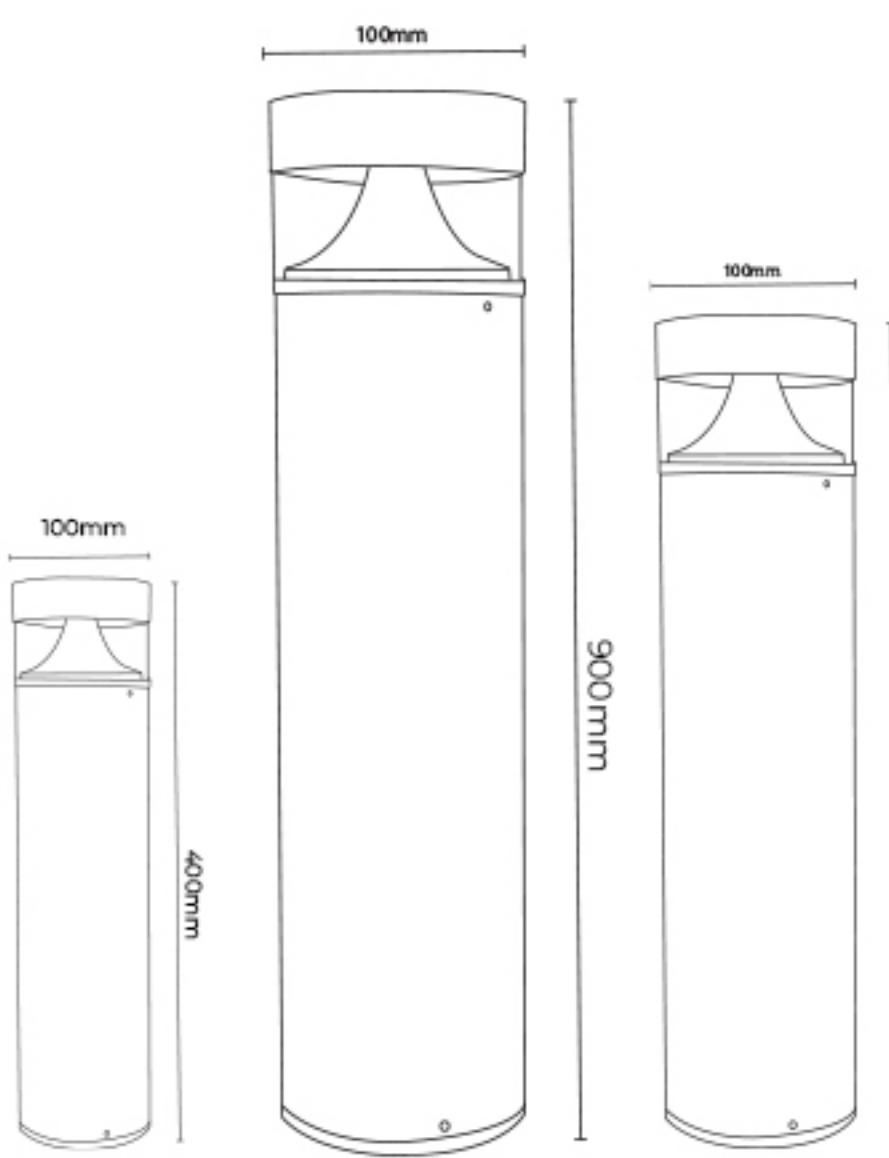

Compact

Cylindrical

Translucent