




TESS
BOLLARD



ANTI-
GLARE

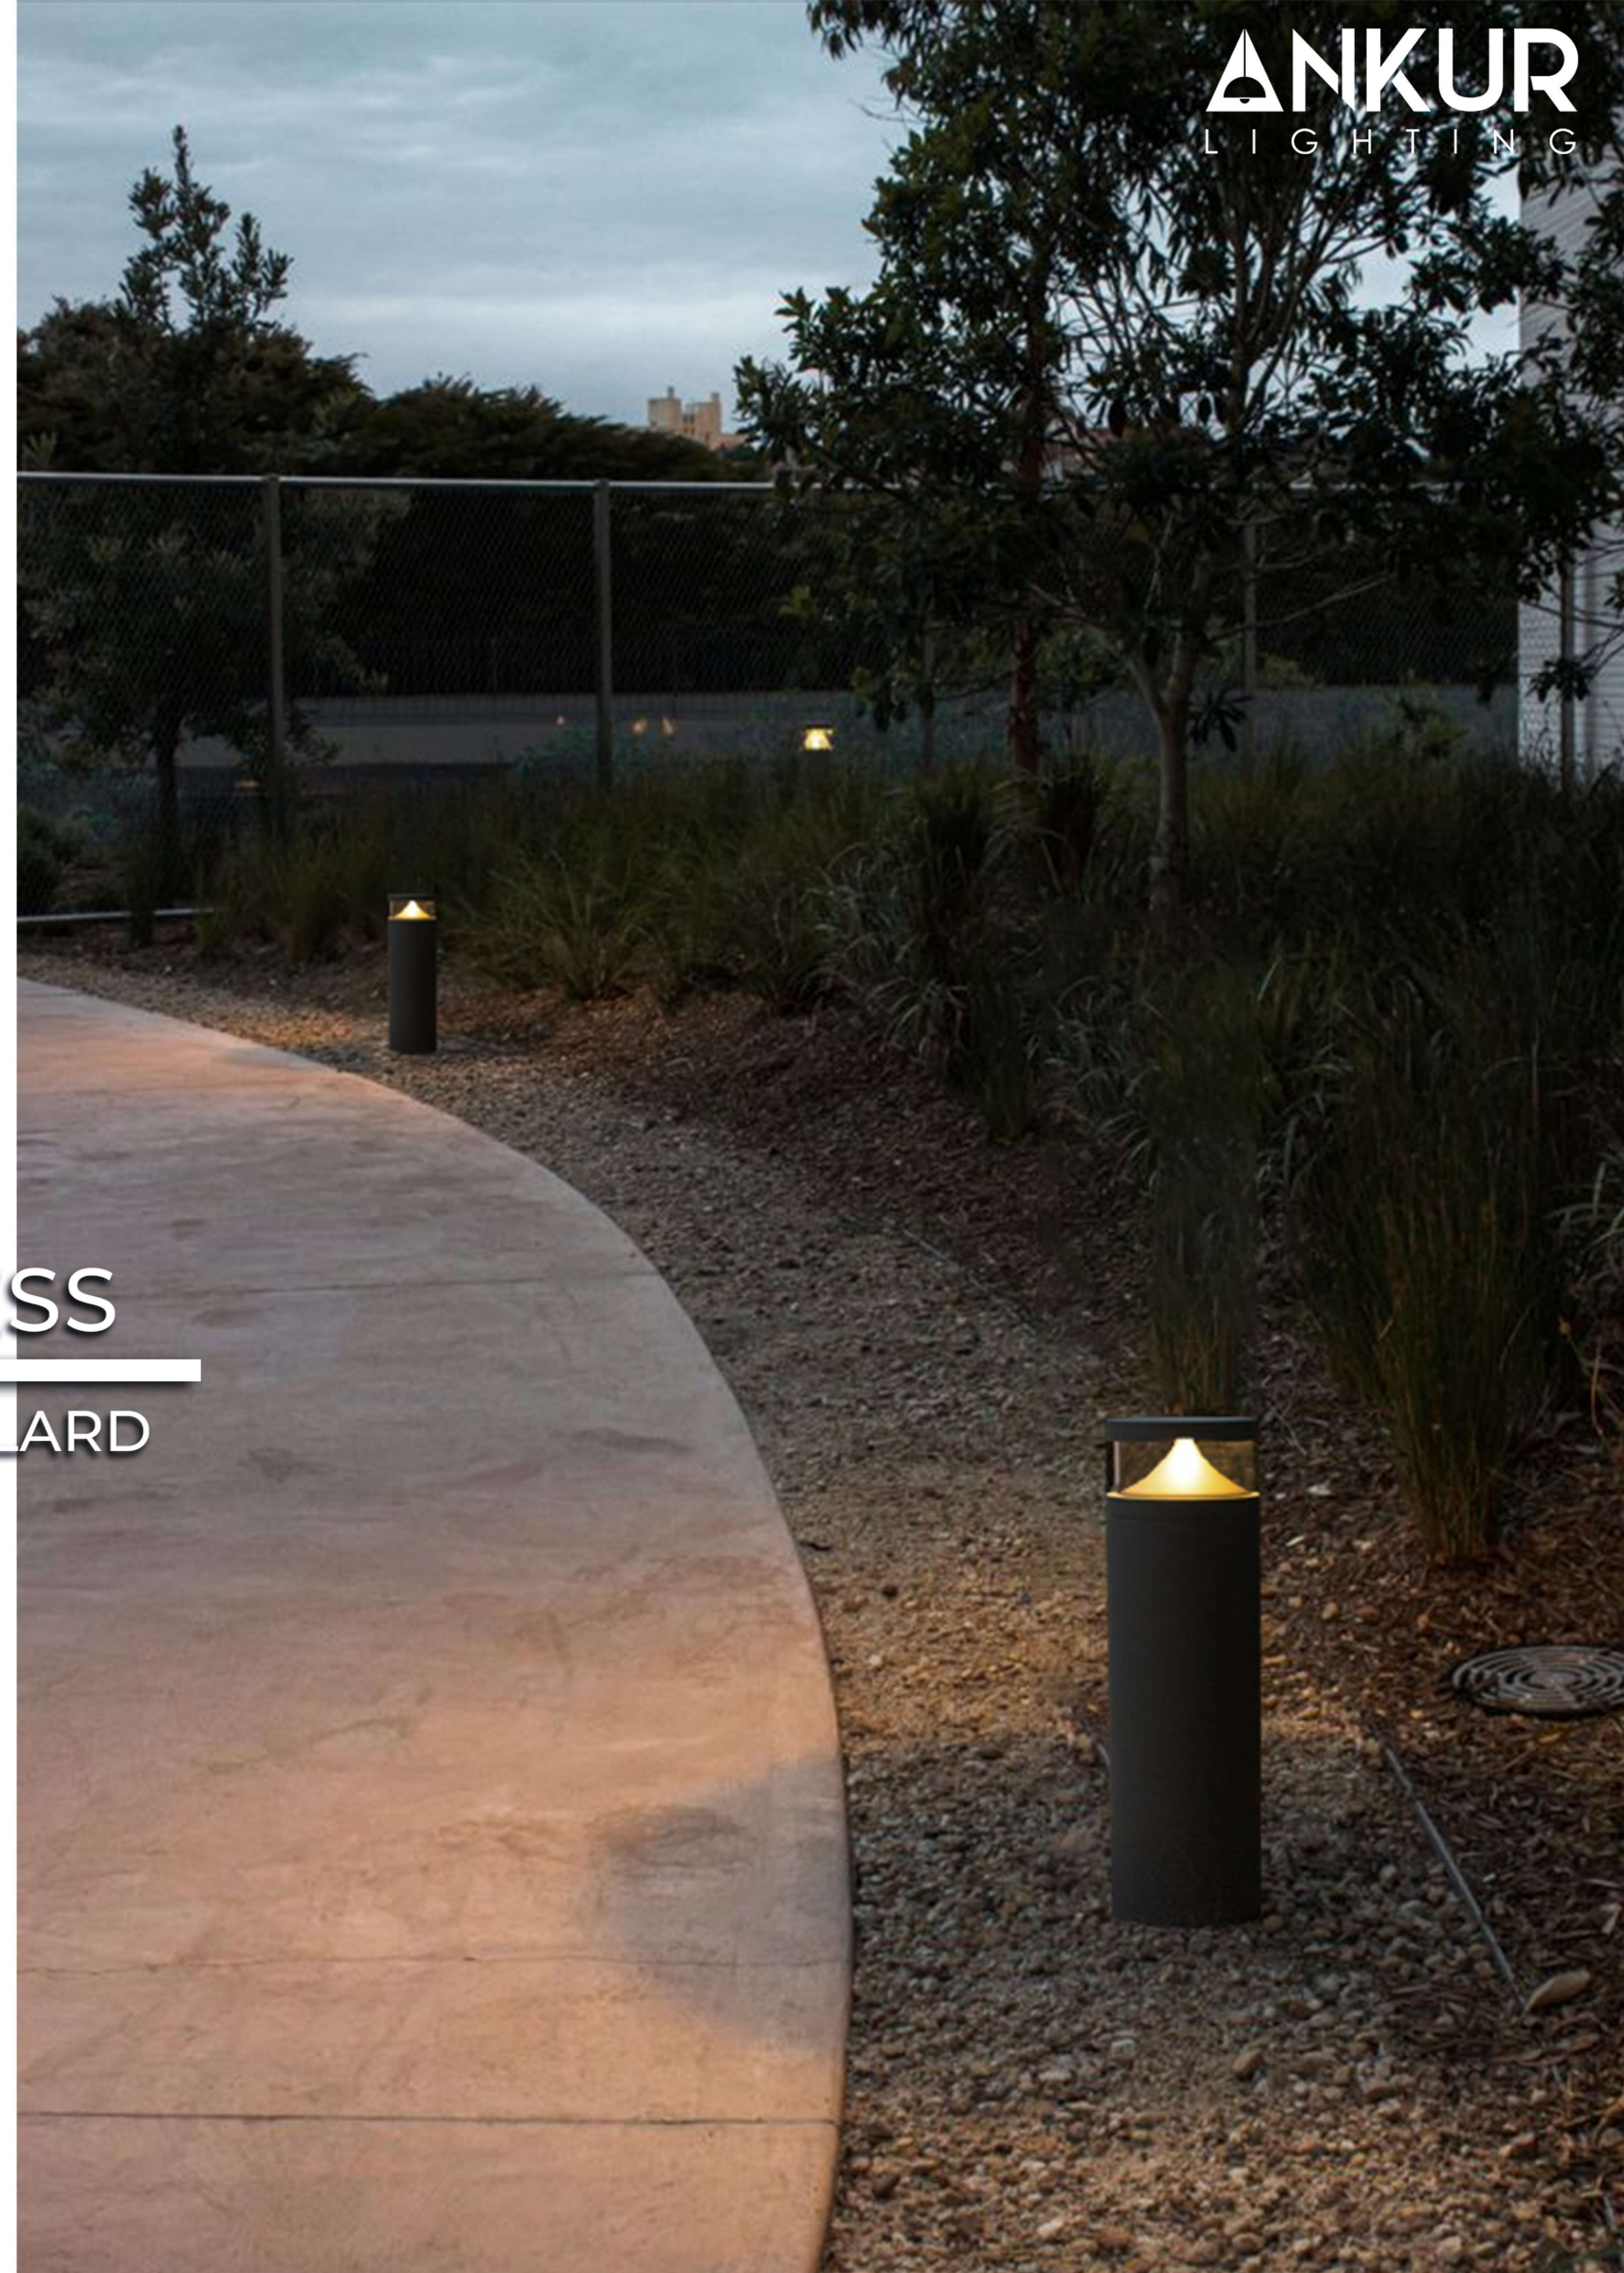

OPTIONAL
DIMMING
ON REQUEST

ANKUR TESS BOLLARD EMPHASIZING ELEGANCE AND ILLUMINATION.

These luminaire heads from our modular system bollard range emit their shielded light symmetrically through 180° or 360° around the installation point and onto the respective ground surface. Luminaires for the glare-free illumination of pathways, open spaces and driveways.



Features



Compact



Cylindrical



Translucent

Technical Specifications

ANKUR TESS BOLLARD

Wattage(W)	12W / 20W / 30W			
Lumen Output	W 2700k	1020lm		
	W 3000k	1080lm		
System Efficiency	No. of LEDs	Multiple SMDs		
Dimensions (in mm)	12W / 20W / 30W			
	Diameter Ø	100	100	100
	Height H	400	600	900

CRI	IP RATING	INPUT	PF	THD	EFFICACY
> 90	IP65	240V/50Hz	>0.9	<10%	>90%
System Specs	Housing	Aluminium			
	Led Make	Bridgelux			
	Driver Location	Inbuilt			

Colour Options	Housing	Black	Gold	Copper	Wood

