

Trazor



TRACK SPOT



SEMI RECESSED




RECESSED MOUNTED





EACH PRODUCT IS ADJUSTABLE




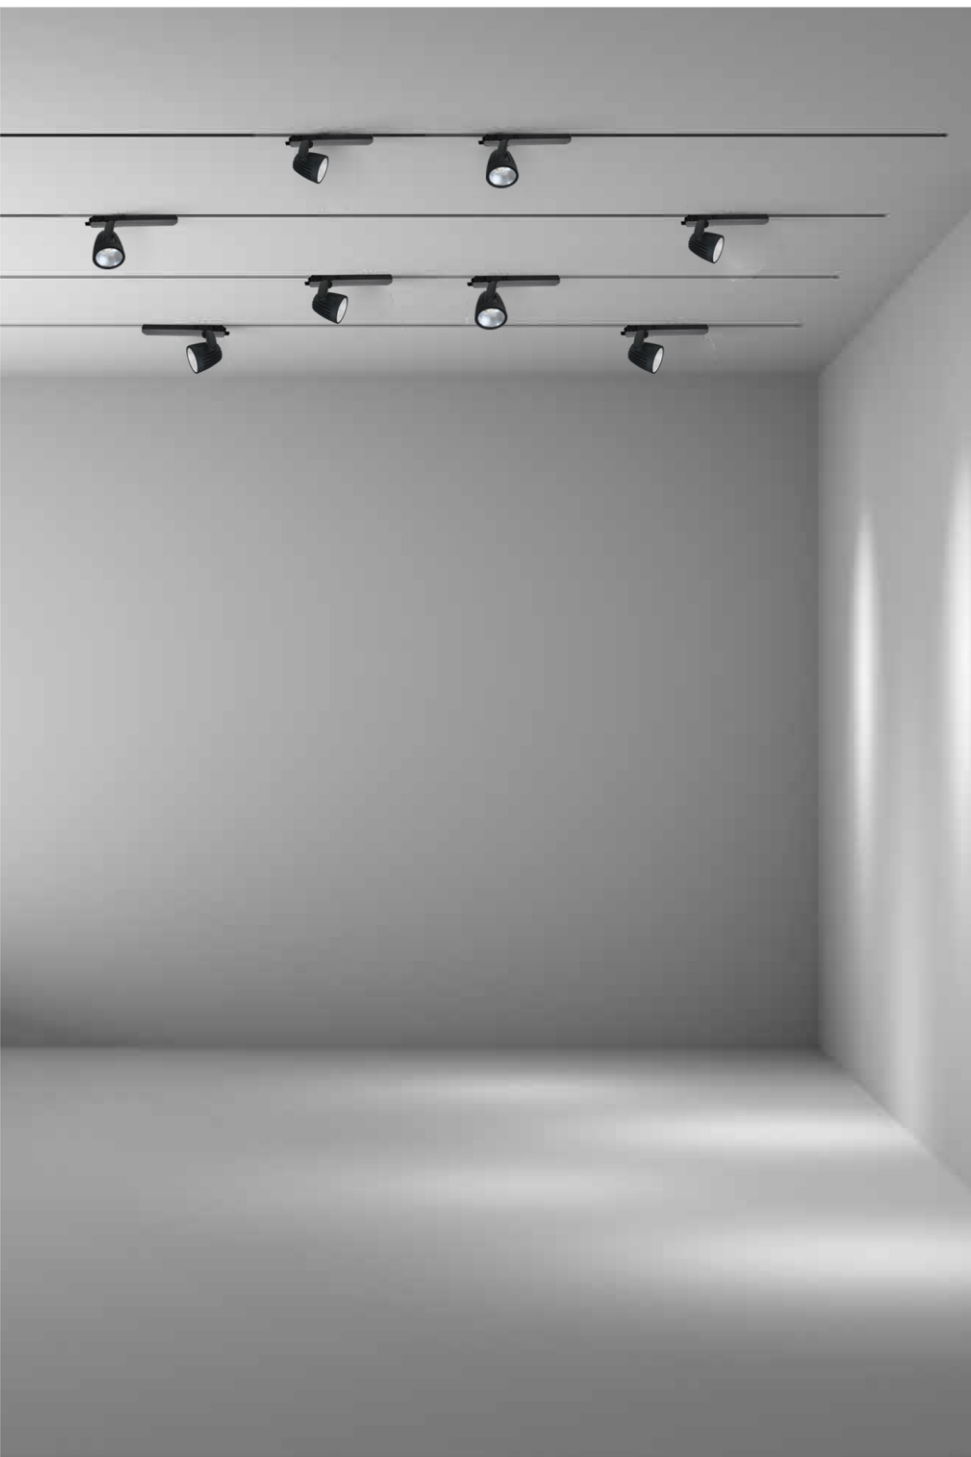


Thanks to the appl
set up each lumina
positions and pres
lighting scenario.

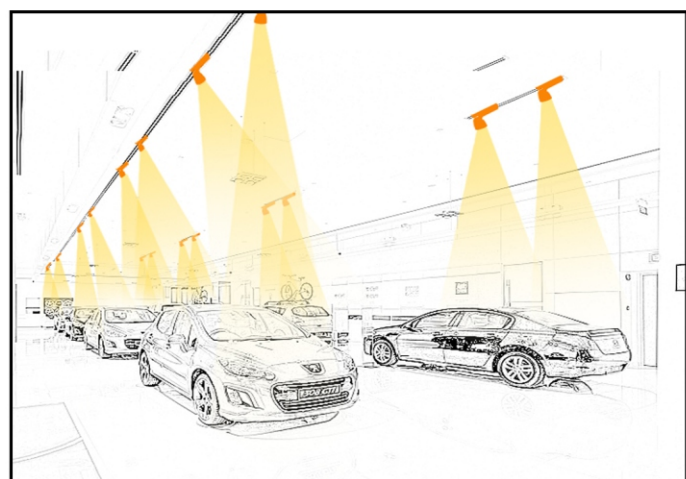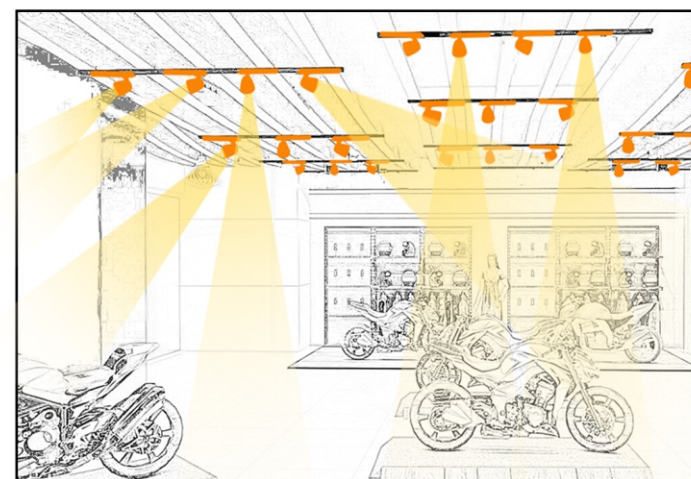





Narrow, medium, flood and wide beam angles are available for different lighting applications.

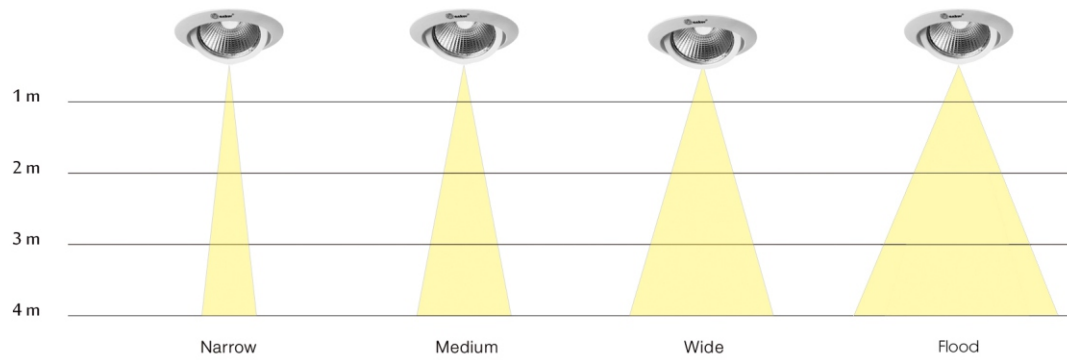



Quick info

GENERAL

Recessed _____
Adjustable _____
Surface _____

LED

COB LED module _____
2700k, 3000k, 3500k, 4000k, 5000k, 6000k _____
CRI >90 _____

ESTIMATED LED LIFETIME

50,000h _____

OPTICAL

Direct illumination _____
Beam angle 14°, 24°, 36°, 60° _____

PHYSICAL

Aluminium die-cast _____
Powder coated _____






Stylish

ANKUR
LIGHTING

Design concept

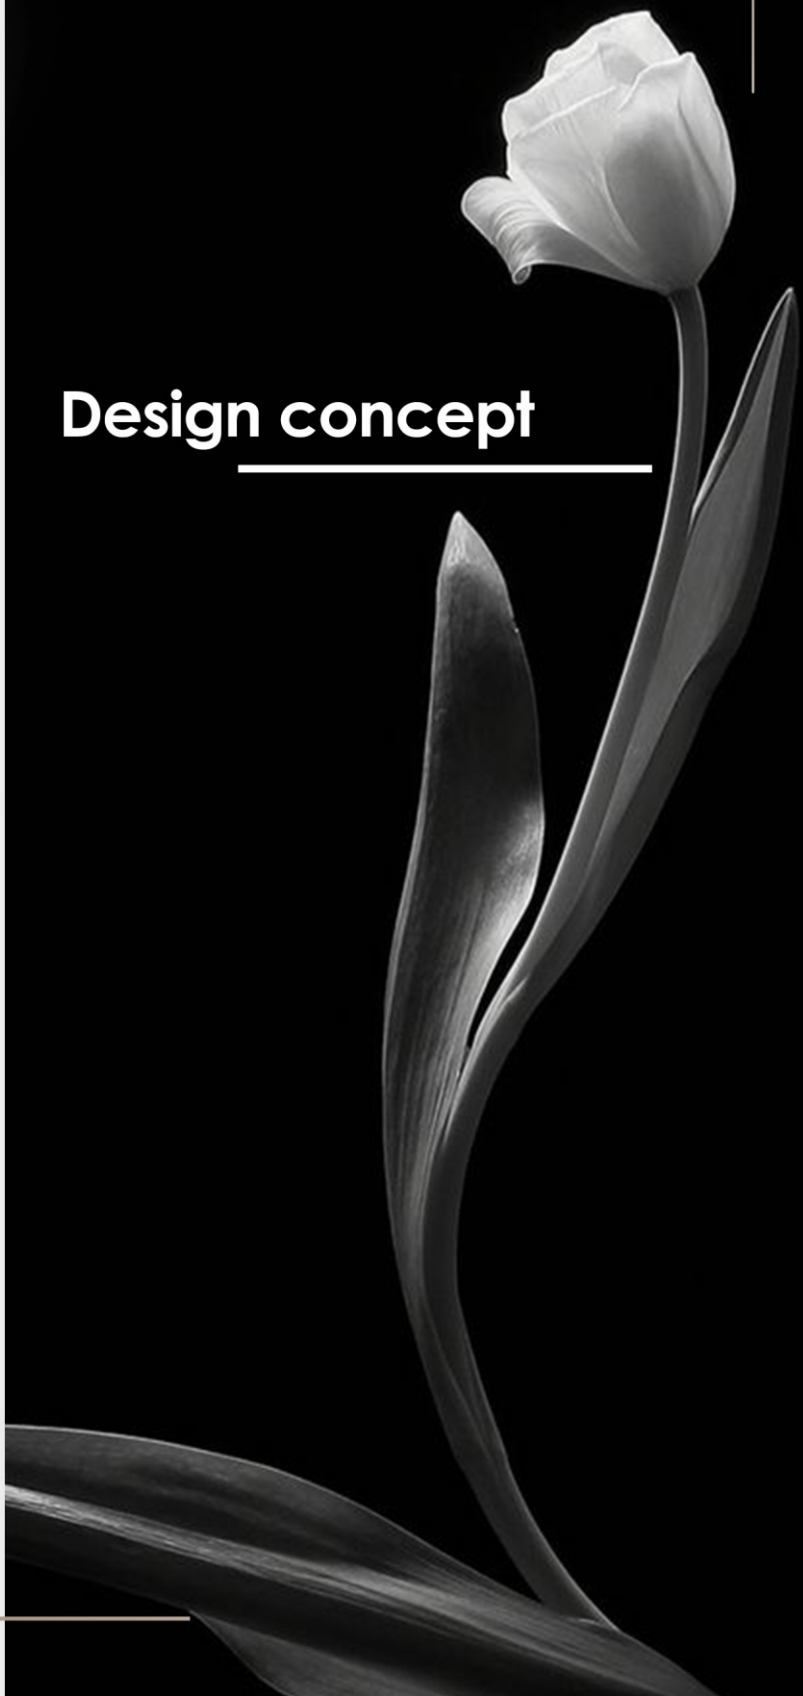







TRAZOR AVAILABLE COLORS



2700k

3000k

3500k




4000k

5000k

6000k



ADJUSTABLE

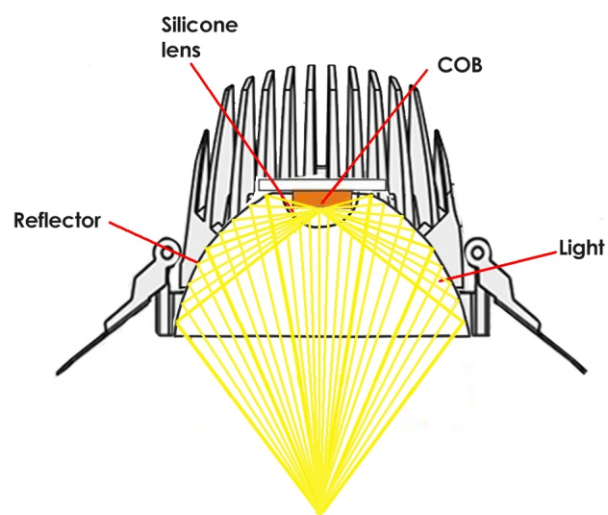

Compact
Trazor






ANKUR XTR LED 3977 20W/30W/40W



Material: Aluminium die-cast
Rotates: 355°
Spot head adjust: 90°

Lamp: COB: 20w/30w/40w
2700K/ 3000K/ 3500k/ 4000K/ 5000K / 6500K
CRI >90
Reflector angle: 14°/24°/36°/60°
AC220V - 50/ 60Hz
Size: Ø 80mm H: 162mm

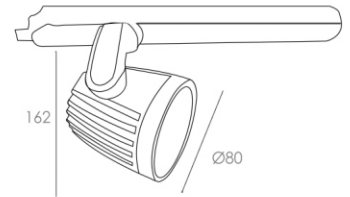


ANKUR XRL - LED - IP/9414 20W/30W/40W



Material: Aluminium die-cast
Rotates: 355°
Spot head adjust: 90°

Lamp: COB: 20w/30w/40w
2700K/ 3000K/ 3500k/ 4000K/ 5000K / 6500K
CRI >90
Reflector angle: 14°/24°/36°/60°
AC220V - 50/ 60Hz
Plate size: Ø110mm
Cut out: Ø100mm




ANKUR XRL LED 9366 20W/30W/40W




Material: Aluminium die-cast
Rotates: fixed
Spot head adjust: 30°


Lamp: COB: 20w/30w/40w
2700K/ 3000K/ 3500k/ 4000K/ 5000K / 6500K
CRI >90
Reflector angle: 14°/24°/36°/60°
AC220V - 50/ 60Hz
Size: Ø120mm H: 90mm
Cut out: Ø95mm




Trazor track spot LED 20W/30W/40W



H(m)	D(m)	E(lx)
1	0.28	5350
2	0.56	1337
3	0.84	594
4	1.12	334
5	1.4	214




H(m)	D(m)	E(lx)
1	0.44	3500
2	0.88	875
3	1.32	388
4	1.76	218
5	2.2	140




H(m)	D(m)	E(lx)
1	0.65	2300
2	1.30	575
3	1.95	255
4	2.6	143
5	3.25	92


Trazor semi recessed mounted LED 20W/30W/40W



H(m)	D(m)	E(lx)
1	0.28	7860
2	0.56	1965
3	0.84	873
4	1.12	491
5	1.4	314



H(m)	D(m)	E(lx)
1	0.44	5140
2	0.88	1285
3	1.32	571
4	1.76	321
5	2.2	205



H(m)	D(m)	E(lx)
1	0.65	3380
2	1.30	845
3	1.95	375
4	2.6	211
5	3.25	135